

WM **WINDOWS MART**

Committed For Quality



STRONG. ELEGANT. RELIABLE.

+91 7017224868

| admin@windowSMART.in

| www.windowSMART.com

Aluminium Windows/Doors

WindowSMART sliding doors are designed for flexibility and elegance. You can choose to have one panel slide while the other remains fixed, or allow both panels to slide independently.



These sliding doors maximize your space, as they don't encroach on your balcony or interiors when opened. Moving smoothly on 2 or 3 tracks, WindowSMART sliding doors offer wide, uninterrupted views along with a seamless indoor-outdoor experience.

Features & Benefits

- Versatile and durable
- Precision rollers ensure smooth movement
- Option to add mesh
- Highly robust and durable
- Built to withstand wind load pressure of up to 3.5 kpa
- Eco-friendly
- Up to 9 ft
- Almost completely maintenance free
- Branded glass & hardware
- Customization in terms of size, glass and colour

Application: Residential and Commercial


Glass Configuration: 5mm Single glass to 24mm DGU glass

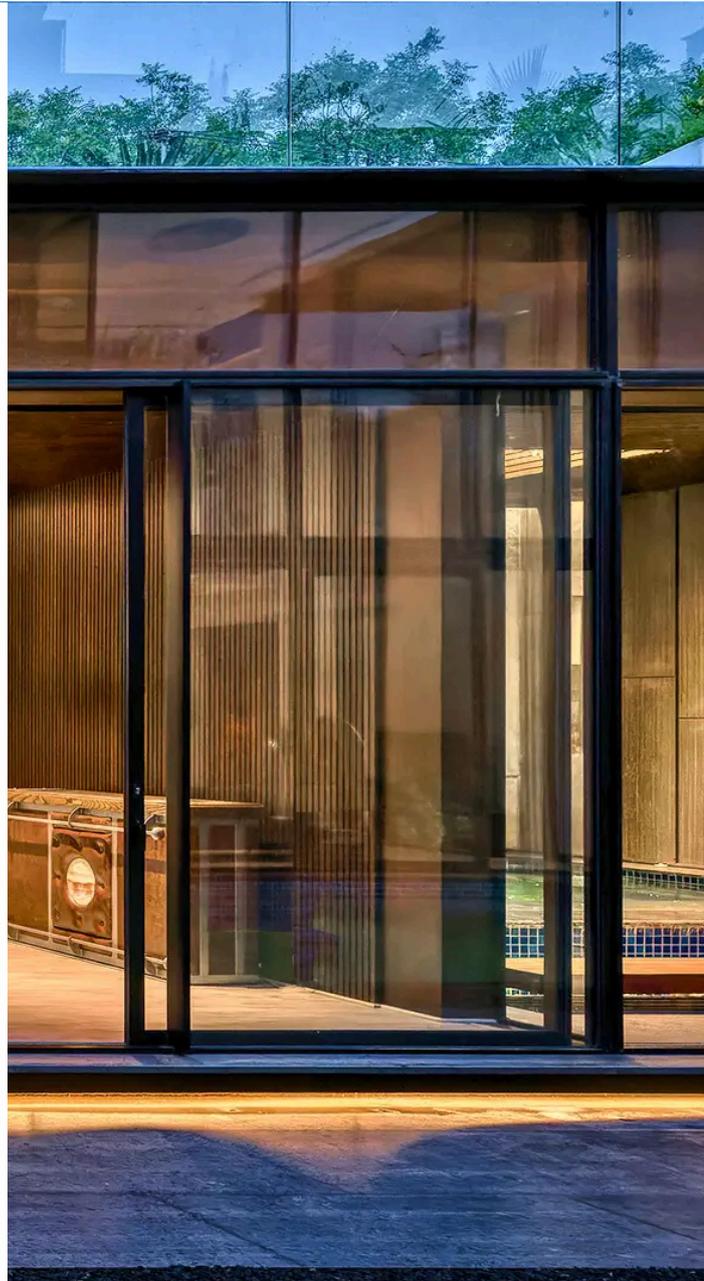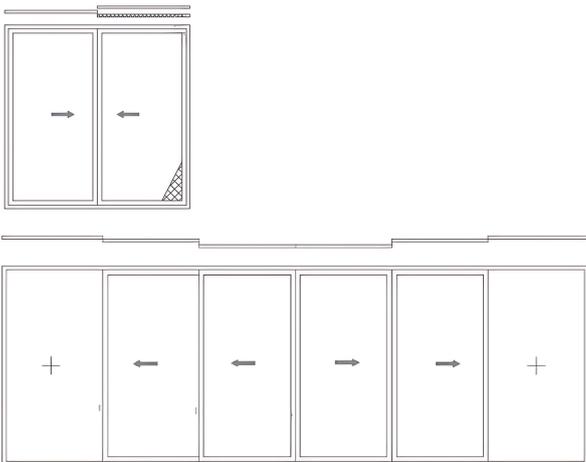

Providing
Services
across all
cities in
India


Possibilities

Sliding windows/doors

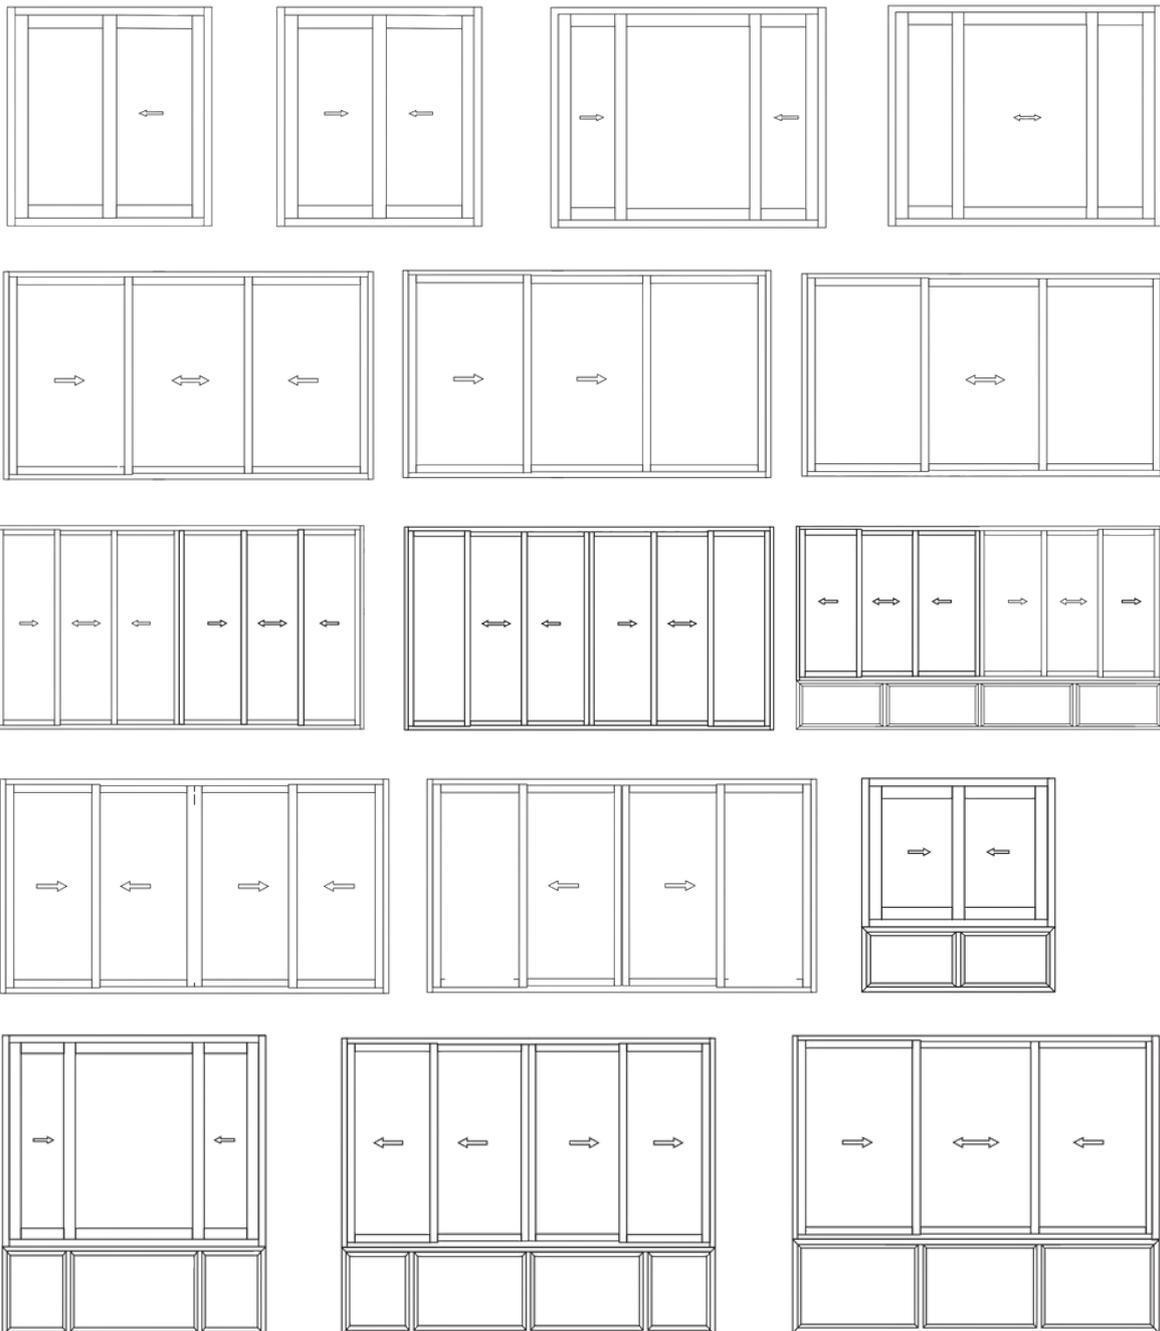





Casement windows/doors

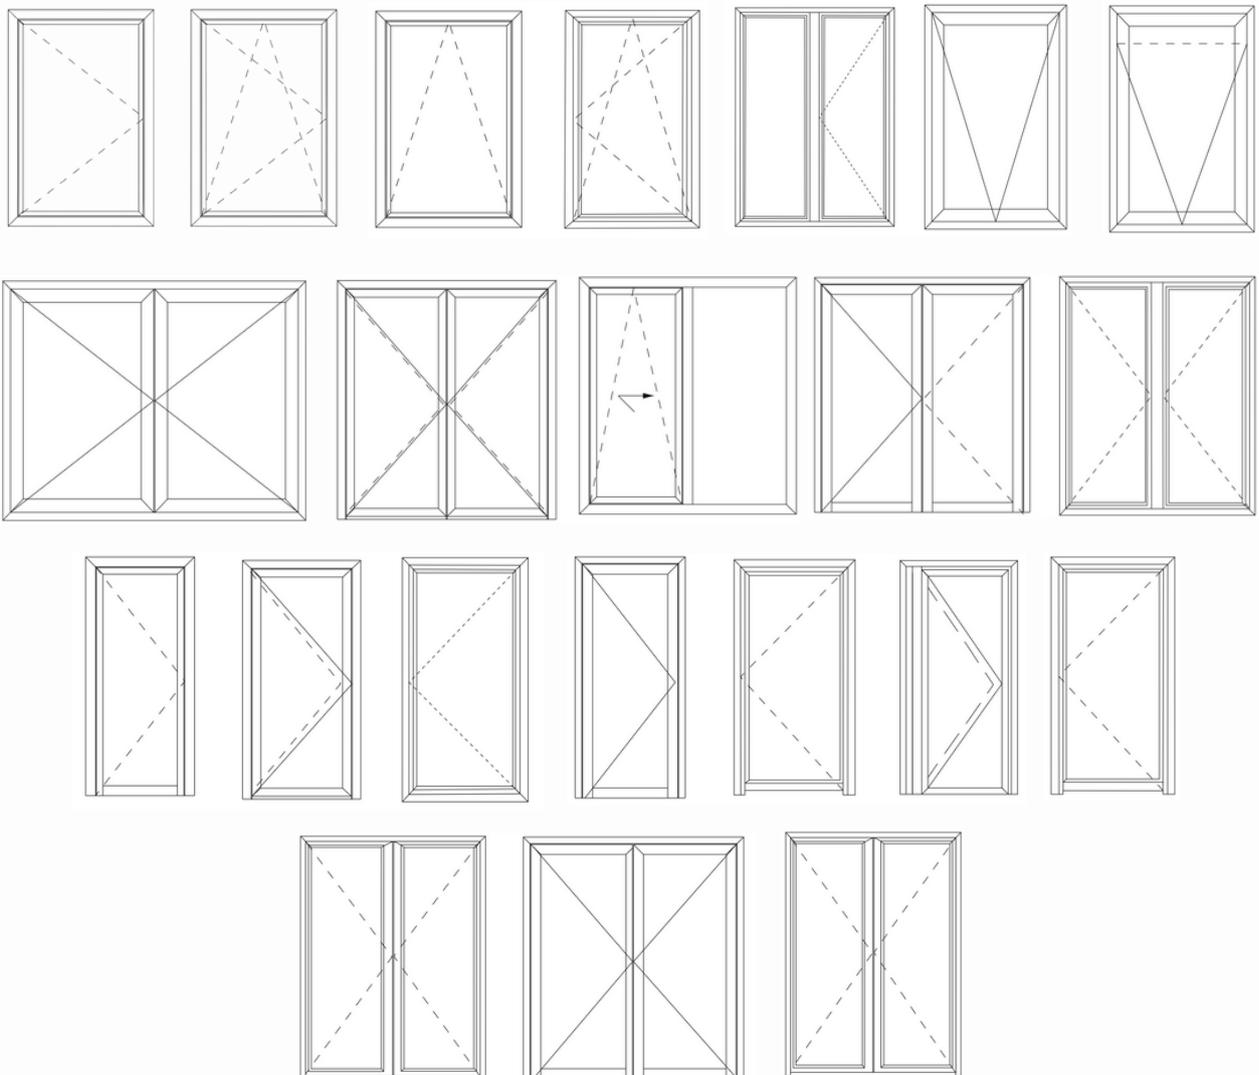

Folding Sliding Door

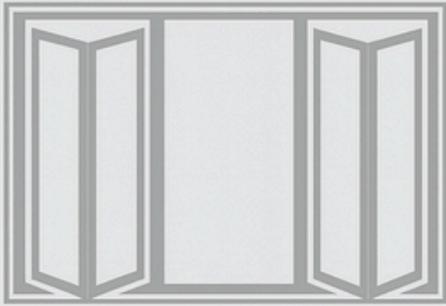


Lift and slide door

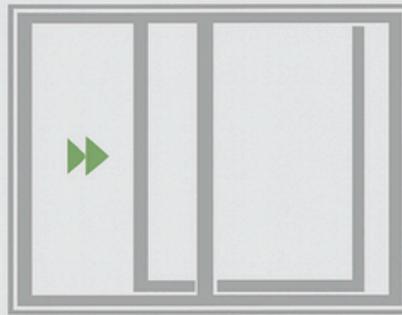

Casement window




Casement door




Tilt and turn



Fixed panel

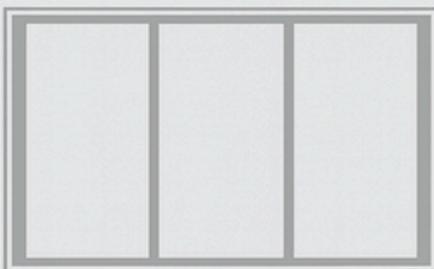

Sliding door

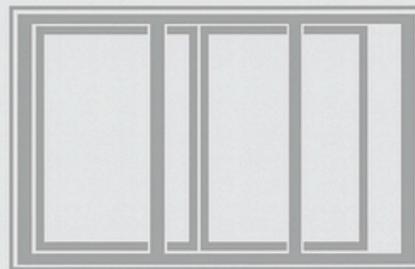


SLEEK SLIDING SERIES



Product Specification

- Alloy : 6063T6
- Glass Range : 5mm to 22mm
- Sash Height : Upto 3000mm
- Sash Width : Upto 1500mm
- Slim Interlock : 25mm
- Locking System : Single / Multiple
- Corner Details : 45°
- Finishing : Powder Coated / Wood / Anodized

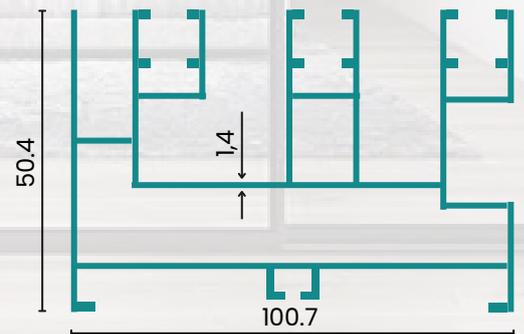


VISTA SLIDING SERIES



Product Specification

- Alloy : 6063T6
- Glass Range : 6mm to 28mm
- Sash Height : Upto 360mm
- Sash Width : Upto 1600mm
- Slim Interlock : 24mm
- Locking System : Multipoint Cylinder Locking
- Corner Details : 45°
- Finishing : Powder Coated / Wood / Anodized

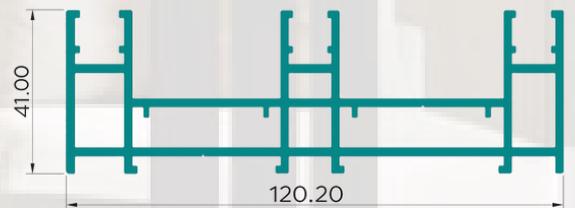


PREMIUM SLIDING SERIES



Product Specification

- Alloy & Temper : 6063 T6
- SGU : Glass 5mm to 8mm
- DGU : Glass Upto 28mm
- Sash Height : 3600mm Maximum Shutter
- Locking Mechanism : Multi System & Center Locking
- Finish: Mill / Anodized / Powder Coated

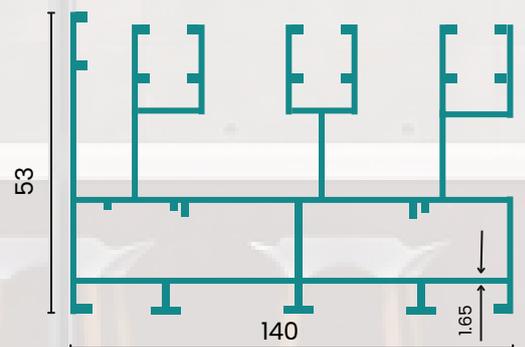

PRIME CASEMENT



Product Specification

- Alloy & Temper : 6063 T6
- SGU : Glass 5mm to 10mm
- DGU : Glass upto 18mm to 24mm
- Sash Height : 3000mm Maximum Shutter
- Locking Mechanisim : Multi Point Lock with Sliding Interlock Section
- Finish : Mill / Anodized / Powder Coated




SKY CASEMENT



Product Specification


- Alloy & Temper : 6063 T6
- SGU : Glass 5mm to 12mm
- DGU : Glass upto 18mm to 38mm
- Sash Height : 3000mm Maximum Shutter
- Locking Mechanisim : Multi Point Lock with Openable and Fixed Partition
- Finish : Mill / Anodized / Powder Coated

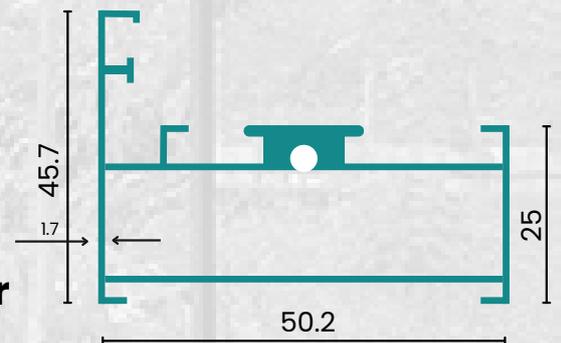

PARALLEL WINDOW

TECHNICAL INFORMATION


- **Frame Construction Depth: 60mm**
- **Locking System: Multipoint**
- **Glass Range: 6mm to 32mm**
- **Corner Details: 45-degree cut, joint with corner connector**
- **Sealing Overlap: 6mm (Sealing with Gasket)**
- **Window Height (Max.): 2400mm**
- **Window Width (Max.): 1200mm**
- **Finishes: Powder / Wood / Anodizing**
- **Alloy: 6063 T6**
- **Hardware: GU / SIEGENIA**

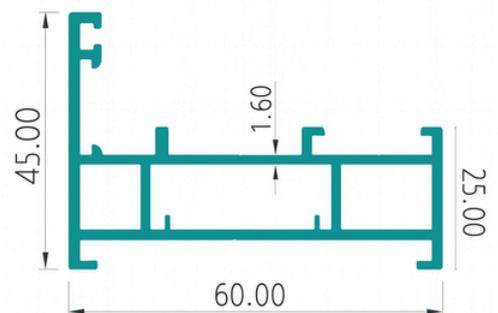

TILT & TURN WINDOW

TECHNICAL INFORMATION


- **Frame Construction Depth: 60mm**
- **Locking System: Multipoint**
- **Glass Range: 6mm to 32mm**
- **Corner Details: 45 degree cut, joint with corner connector**
- **Sealing Overlap: 6mm (Sealing with Gasket)**
- **Window Height (Max.): 2400mm**
- **Window Width (Max.): 900mm**
- **Finishes: Powder / Wood / Anodizing**
- **Alloy: 6063 T6**
- **Hardware: WINDOWSMART**

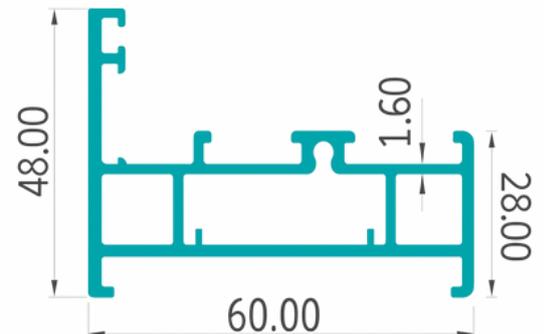

SLIDE & FOLD DOOR

TECHNICAL INFORMATION


- **Frame Construction Depth: 60mm**
- **Locking System: Multipoint**
- **Glass Range: 6mm to 32mm**
- **Corner Details: 45 degree cut, joint with corner connector**
- **Sealing Overlap: 6mm (Sealing with Gasket)**
- **Door Height (Max.): 3500mm**
- **Sash Width (Max.): 900mm**
- **Finishes: Powder / Wood / Anodizing**
- **Alloy: 6063 T6**
- **Hardware: WINDOWSMART**

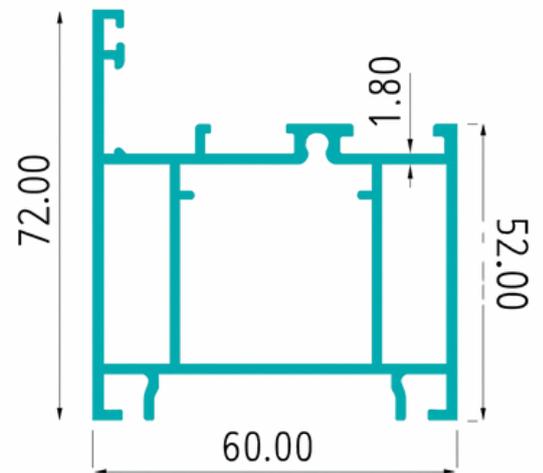


LIFT & SLIDE DOORS

TECHNICAL INFORMATION


- **Frame Construction Depth: 125mm, Two Track**
- **Locking System: Multipoint Cylinder Locking**
- **Glass Range: 12.5mm to 32mm**
- **Frame Corner Details: 90 degree cut, joint with screw**
- **Sash Corner Details: 45 degree cut, joint with corner connector**
- **Sealing: (Sealing with Gasket Seal)**
- **Sash Height (Max.): 3600mm**
- **Sash Width (Max.): 3000mm**
- **Weight (Max.): 600kg**
- **Finishes: Powder / Wood / Anodizing**
- **Alloy: 6063 T6**
- **Hardware: WINDOWSMART**

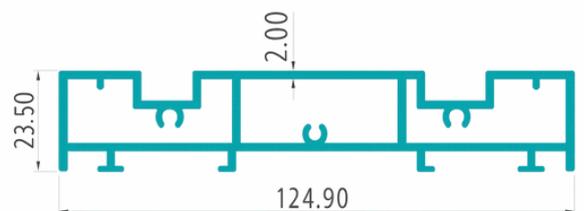

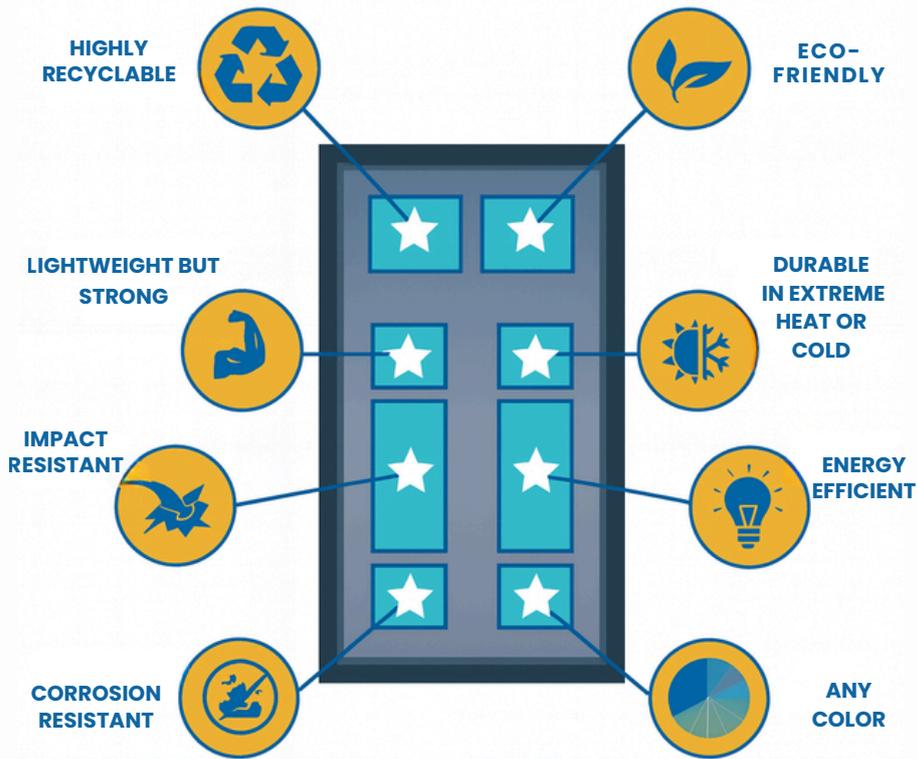

Why Aluminium Windows?



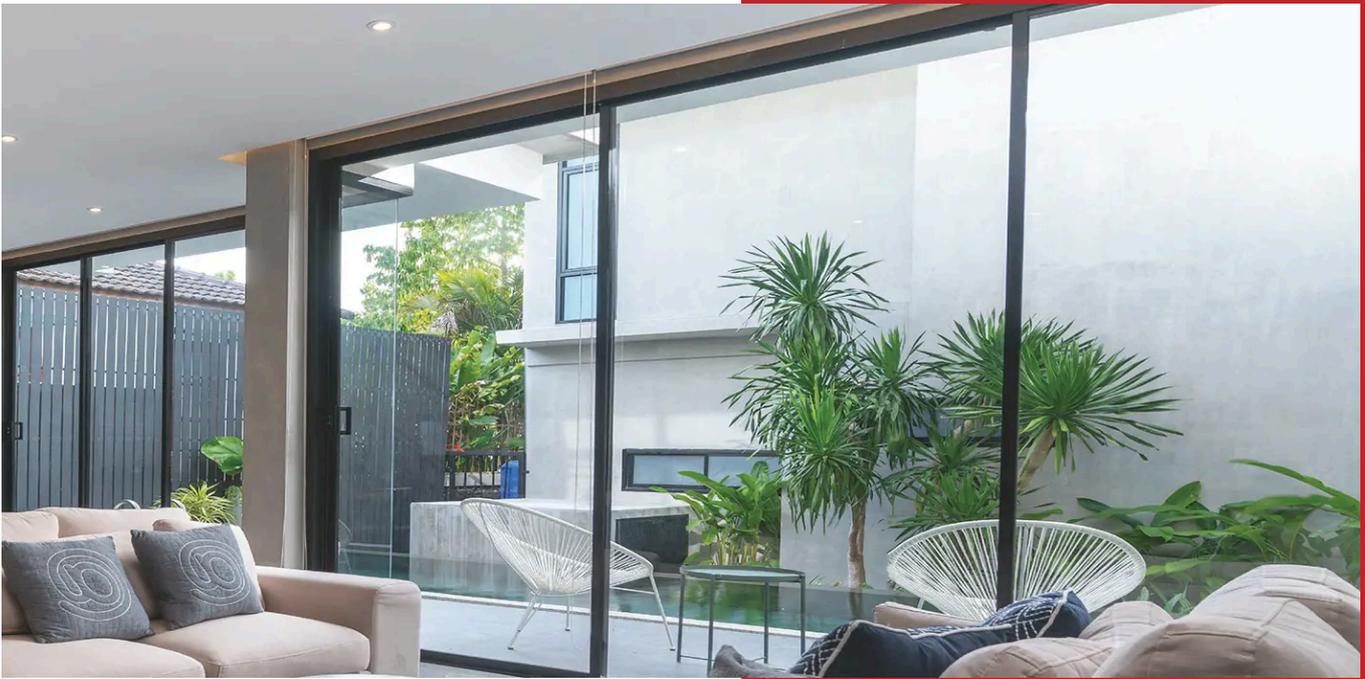

FEATURES



Sound Resistant Interlocks with Double Sealing

WindowSMART aluminium systems provide superior sound insulation for a peaceful indoor environment. The advanced gasket technology minimizes shutter vibration and external noise, while the double sealing ensures complete protection against dust and wind.



Designed for torrential weather conditions

Engineered for India's diverse climate, WindowSMART profiles feature reinforced interlocks and handles that provide enhanced stability and performance – ensuring durability even in heavy rain, strong wind, or extreme temperatures.



Sturdy shutter joinery with plastic inserts

Our precision-engineered joinery with twin-screw fittings ensures unmatched strength and stability. Anti-rattle plastic inserts eliminate gaps and vibration, providing smooth and noise-free operation.



Sturdy and leak-proof frame joinery

WindowSMART's innovative Frame Inserts prevent any water seepage or air leakage, maintaining perfect insulation. The unique design ensures long-lasting protection, keeping your interiors completely dry and comfortable.



Solid aluminium extruded track

The robust aluminium extruded track design supports shutter weight efficiently, preventing sagging and maintaining smooth operation over years of use. Built for strength, performance, and longevity.




Gated Drainage

Our advanced one-way water drainage system efficiently channels out rainwater while preventing wind or dust intrusion – ensuring a clean, secure, and weather-resistant structure.

FOLD - SLIDE



POSSIBILITIES

Design Scheme

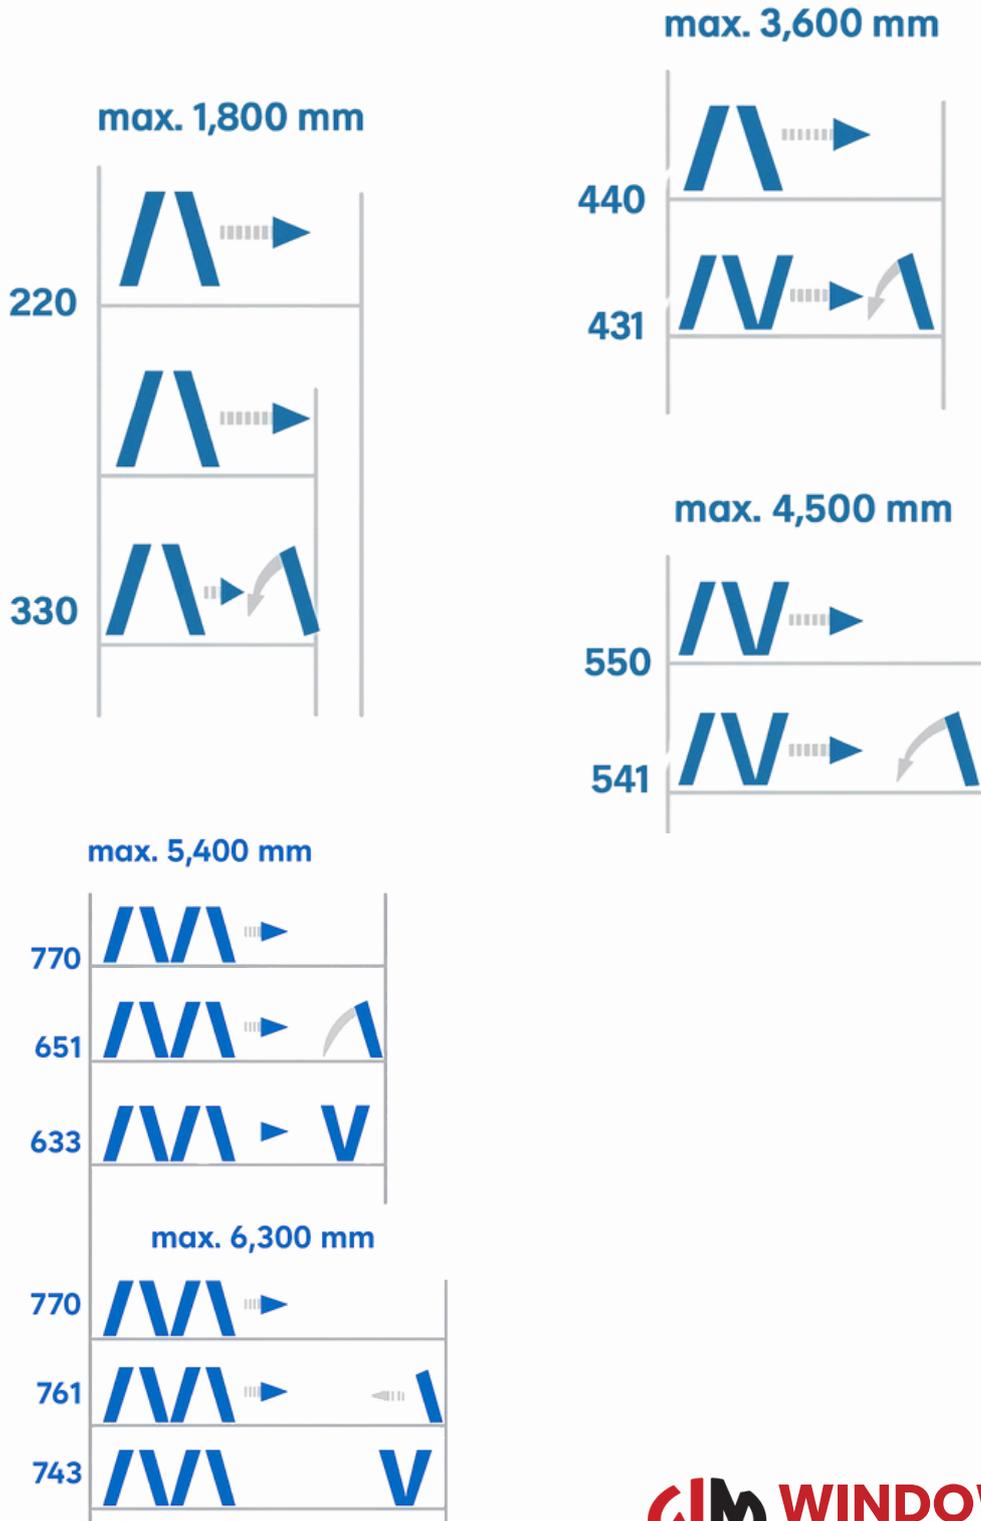

LEFT - SLIDE

POSSIBILITIES

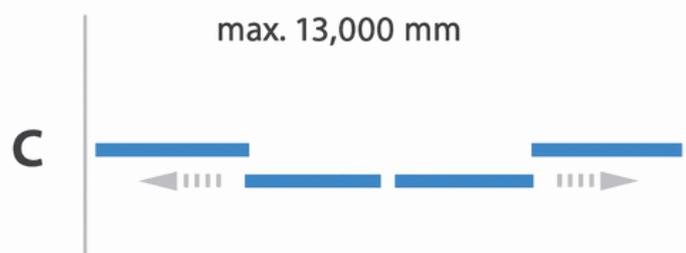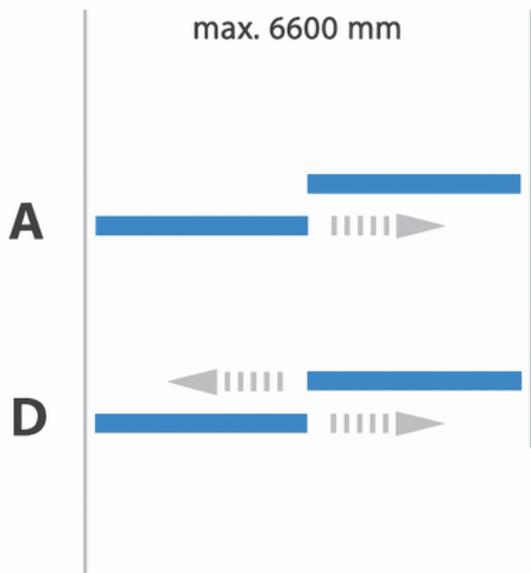

WM **WINDOWS MART**

Committed For Quality

Today's homeowners don't see windows as just frames for a view
-they expect comfort, safety, and elegance. As an industry, we
must innovate to deliver beyond expectations.

Er. Ankit Rawat

Founder, Windows Mart

WINDOWS MART

Plot no 29B, Parthla Khanjarpur, Sector 122, Noida 201307

E-mail : admin@windowsmart.in

www.windowsmart.in

Scan for website



Talk to us : +91-7017224868

www.windowsmart.in

Scan for location

